

LV-16 for imc CRONOScompact (CRC/LV-16)

16-channel Differential Amplifier

LV-16 is a measurement amplifier for 16 channels available as a plug-in module for **imc CRONOScompact** or as a configuration module for **CRONOS-SL**. It enables measurement of 16 differential analog channels which can measure voltage and current.

By means of an optional connector, the measurement of ICP sensors¹ is also possible.

Highlights


- Acquisition of voltage and current
- Supports *imc Plug & Measure* (Transducer Electronic Data Sheets)

imc CRONOScompact - modular measurement system

imc CRONOScompact is a modular and reconfigurable hardware a "rack"-based series of devices available in a variety of housing sizes and device frames. imc CRONOScompact (CRC) plug-in-modules can be inserted into the system (CRC-400GP).

Once the modules are plugged into a portable or rack-based housing, they are electrically connected to the CRC-system and are supplied by the system with power. The data storage will be managed by the CRC-system.

Rack-based modules ("-R") differ from the standard modules only in terms of the front panel's attachment mechanism.

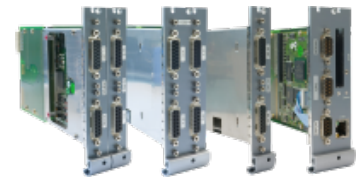

imc CRONOScompact plug-in-modules



imc CRONOScompact portable housing

Overview of available variants

Standard version		ET version *	
Order Code	article no.	article no.	remarks
CRC/LV-16	11700051	11710026	for installation in an imc CRONOScompact housing
CRC/LV-16-R	11700115	11710074	for installation in an imc CRONOScompact RACK

* ET: Version in extended temperature range

Included accessories

DSUB-15		
ACC/DSUBM-U4	DSUB-15 plug with screw terminals for 4 channel voltage measurement	13500166
Documents		
Getting started with imc CRONOScompact (one copy per delivery / system)		
Device certificate		

Optional accessories

DSUB-15 plugs

- | | | |
|---------------------|--|----------|
| • ACC/DSUBM-U4 | DSUB-15 plug with screw terminals for 4-channel voltage measurement | 13500166 |
| • ACC/DSUBM-TEDS-U4 | DSUB-15 plug with screw terminals for 4-channel voltage measurement | 13500189 |
| • ACC/DSUBM-I4 | DSUB-15 plug with screw terminals for 4-channel current measurement of up to 50 mA (50 Ω shunt, scaling factor: 0.02 A/V) | 13500168 |
| • ACC/DSUBM-TEDS-I4 | version with TEDS support, according to IEEE 1451 for use with imc Plug & Measure | 13500192 |

Mounting brackets for fixed installations of imc CRONOScompact devices (CRC)

- | | | |
|--------------------|-------------------------------|----------|
| • CRC/BRACKET-CON | mounting bracket 90° | 11700153 |
| • CRC/BRACKET-90 | mounting bracket for DIN-Rail | 11700152 |
| • CRC/BRACKET-BACK | mounting bracket for DIN-Rail | 11700154 |

Technical Specs - CRC/LV-16

Parameter	Value	Remarks
Inputs	16	differential, analog, non isolated
Measurement modes (DSUB)	voltage measurement current measurement current fed sensors (IEPE/ICP)	with shunt plug (ACC/DSUBM-I4) with DSUB-15 expansion plug ACC/DSUB-ICP4, not isolated ACC/DSUBM-ICP2I-BNC-S/-F ¹ , isolated
Measurement modes (LEMO)	voltage measurement current measurement	with external shunt
Terminal connection Standard	4x DSUB-15 socket 4 channels per plug	
LEMO	16x LEMO / 1 channel per socket	

Sampling rate, Bandwidth, Filter, TEDS		
Parameter	Value	Remarks
Sampling rate	≤20 kHz	per channel
Bandwidth	0 Hz to 6.6 kHz 0 Hz to 5 kHz	-3 dB (analog AAF 5th order) -0.2 dB
Filter (digital) cut-off frequency characteristic order	2 Hz to 5 kHz	Butterworth, Bessel (digital) low pass filter 8. order Anti-aliasing filter: Cauer 8. order with $f_{\text{cutoff}} = 0.4 f_s$
Resolution	16 Bit	internal processing 24 Bit
TEDS	conforming to IEEE 1451.4 Class II MMI	esp. with ACC/DSUBM-TEDS-xx (DS2433)

General			
Parameter	Value typ.	min. / max.	Remarks
Overvoltage protection		±40 V	permanent channel to chassis
Input coupling	DC		
Input configuration	differential		
Input impedance	20 MΩ		differential, >10 kΩ off-state
Auxiliary supply			for IEPE/ICP-extension plug
voltage	+5 V	±5%	independent of integrated sensor
available current	0.26 A	0.2 A	supply, short-circuit protected power
internal resistance	1.0 Ω	<1.2 Ω	per DSUB-plug

- 1 When using the two-channel IEPE plug in combination with the analog inputs, which provide four channels per socket, only channels 1 and 3 can be used.

Voltage measurement			
Parameter	Value typ.	min. / max.	Remarks
Input ranges	±10 V, ±5 V, ±2.5 V, ±1 V, ±500 mV, ±250 mV		
Gain: error drift	0.02 % ±8 ppm/K·ΔT _a	≤0.05 % ±30 ppm/K×DT _a	of reading ΔT _a = T _a -25°C ; with T _a = ambient temperature
Offset: error drift	0.02 % (±18 μV/K)·ΔT _a (±2 μV/K)·ΔT _a	≤0.05 % (±45 μV/K)·ΔT _a (±5 μV/K)·ΔT _a	of range ±10 V to ±2.5 V ±1 V to ±250 mV ΔT _a = T _a -25°C ; with T _a = ambient temperature
Max. common mode voltage		±12 V	
Common mode rejection Ranges ±10 V to ±2.5 V ±1 V to ±250 mV	-90 dB -108 dB	-80 dB -97 dB	common mode test voltage: ±10 V _± and 7 V _{rms'} 50 Hz
Channel to channel crosstalk Ranges 10 V to ±2.5 V ±1 V to ±250 mV	-90 dB -116 dB		test voltage: ±10 V _± and 7 V _{rms'} 0 Hz to 50 Hz; range: ±10 V
Noise	12 μV _{rms}		bandwidth: 0.1 Hz to 1 kHz

Current measurement			
Parameter	Value typ.	min. / max.	Remarks
Input ranges	±50 mA, ±20 mA, ±10 mA, ±5 mA		50 Ω shunt in terminal plug
Max. over load	±60 mA		permanent
Input configuration	differential		50 Ω shunt plug (ACC/DSUBM-I4)
Gain: error drift	0.02 % (±20 ppm/K)·ΔT _a	≤0.06 % ≤0.1 % (±55 ppm/K)·ΔT _a	of reading plus error of 50 Ω shunt ΔT _a = T _a -25°C ; with T _a = ambient temperature
Offset: error drift	0.02 % (±30 nA/K)·ΔT _a	≤0.05 % (±60 nA/K)·ΔT _a	of range ΔT _a = T _a -25°C ; with T _a = ambient temperature